CRYOTECH E36® LAVATORY ANTIFREEZE

Why E36 Lavatory Antifreeze?

Cryotech E36 Lavatory Antifreeze is a potassium acetate-based freeze point depressant used as a component in aircraft lavatory fluid. Easy to handle, E36 Lavatory Antifreeze has a low freeze point and is safe for the environment.

BENEFITS

- · Effectively used as the freeze point depressant component of aircraft lavatory fluids
- Easy to handle no agitation required
- Safe for the environment
- · Non-hazardous; adds no special disposal concern
- Cost effective
- Complimentary customer training upon request

PERFORMANCE

- · Successfully used by major airlines and military
- Has a low freeze point of -76°F (-60°C)
- Formulated to protect aircraft metals

ENVIRONMENT

- · BOD is less than one-third that of propylene glycol formulations
- Readily biodegradable
- Does not contain glycols or alcohols
- · Recognized as "relatively harmless" by U.S. Fish and Wildlife scale

HANDLING

- · Polyethylene or stainless steel containers are preferred, otherwise use carbon or low alloy steel
- · Best practices include storing totes and drums in areas protected from weather and exposure to direct sunlight
- Application may be diluted to desired freeze point
- Non-toxic, safe for workers see product SDS
- Lavatory antifreeze should not be stored, piped or plumbed through systems that use galvanized, zinc, or brass components
- Contact your local airport or wastewater treatment facility for site-specific considerations


See reverse side for product specifications | Complete technical brochure available upon request ISO 9001: 2015 & 14001:2015 CERTIFIED COMPANY © 2019 Copyright Cryotech Deicing Technology





CRYOTECH E36® LAVATORY ANTIFREEZE PRODUCT SPECIFICATIONS

COMPOSITION	APPEARANCE	DENSITY	VISCOSITY
Potassium Acetate-based solution plus corrosion inhibitors	Clear, blue*, mobile liquid, free from matter in suspension	10.68 lbs/gallon	At 68°F (20°C) = 6cP maximum At 32°F (0°C) = 12cP maximum
FLASH POINT	FREEZE POINT	MISCIBILITY WITH WATER	SPECIFIC GRAVITY
Nonflammable	-76°F (-60°C)	Complete	At 68°F (20°C) = 1.25 - 1.30
TYPICAL pH	PACKAGING		APPLICATION
10.5 to 11.5	 55 gallon drums (208 liters) - 4 drum minimum 265 gallon tote (1003 liters) - 1 tote minimum Bulk - 4400 gallons minimum * MAY BE COLORLESS AT CUSTOMER REQUEST 		May be diluted to desired freeze point

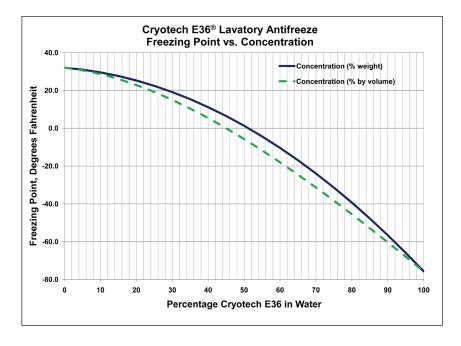

TO ORDER OR FOR PRODUCT INFORMATION CONTACT:

Ph: +1 319.372.6012 or +1 800.346.7237 Fax: +1 319.372.2662 E-mail: deicers@cryotech.com

Cryotech Deicing Technology . 6103 Orthoway . Fort Madison, IA 52627 . www.cryotech.com